



Reliable

Reliable and accurate measurement of the level

Cost effective

Maximising the loading capacity of the tanks

User friendly


Standard sensors for all tanks allow simple planning

Crude oil storage tank

Level measurement and point level detection in FPSO crude oil tanks

Crude oil is pumped directly into the cargo tanks on board in order to separate gas, oil and water from each other using gravity. To ensure profitable utilisation of the loading capacities as well as effective control of the pumps, the level is measured continuously and the point levels are monitored.

[More details](#)

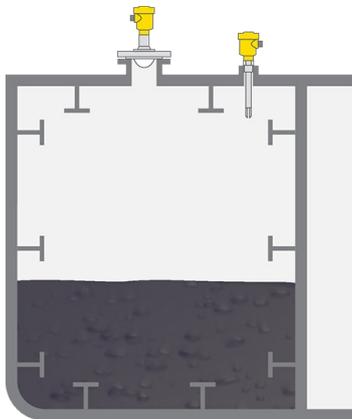

VEGAPULS 6X

Radar sensor for continuous level measurement in the FPSO crude oil tank

- Tight focusing of the radar beam thanks to 80 GHz technology, enables reliable measurement down to the tank bottom, even with narrow rib spacing
- High accuracy independent of oil consistency
- Simple installation due to small process fittings

[Show Product](#)



VEGASWING 63

Vibrating level switch as overflow protection in the crude oil tank

- Millimetre-exact detection of the switching point, independent of oil consistency
- Adjustment-free sensor allows simple installation
- Simple function test with optional test button on the sensor

[Show Product](#)

PRO

VEGAPULS 6X

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN20, ≥ $\frac{3}{4}$ "

Hygienic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGASWING 63

[Show Product](#)



Process temperature
-50 ... 250 °C

Process pressure
-1 ... 64 bar

Version
Standard
Hygienic applications
with gas-tight leadthrough
with tube extension
with temperature adapter

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
ECTFE
Enamel

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN25, ≥ 1"

Hygienic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Varivent ≥ DN25
hygienic fitting F40 with compression nut
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic flange connection DIN11864-2-A;
DN60(ISO)ø60,3
SMS socket piece DN38 PN6

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65