

#### Reliable

Reliable measurement despite changing process conditions

#### Cost effective

Optimum utilization of the vessel volume

#### User friendly


Complete, safe and automated operation of the facility

## Receiving tank for hazardous waste

### Level measurement and point level detection in a receiving tank

Hazardous waste can include lacquers, paints and thinners, as well as acids, alkalis and mixtures. At hazardous waste treatment facilities, environmentally harmful substances are converted into environmentally safe ones. Before treatment, the liquid hazardous waste is collected in receiving tanks. Level measuring systems ensure the automated, monitored operation of the facility, thereby protecting human health and the environment.

[More details](#)

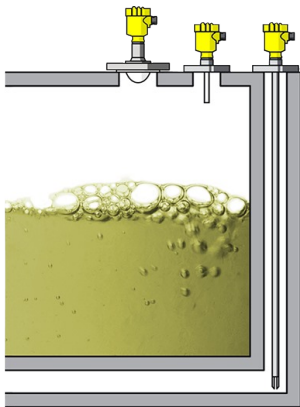

#### VEGASWING 63

Vibrating level switch for leakage detection in the receiving tank

- Reliable detection of leaks in the wall of the receiving tank
- Fast and reliable function test via simple keypress
- Simple installation and setup

[Show Product](#)



#### VEGACAP 63

Capacitive point level detection in the receiving tank

- Maintenance-free overflow protection of the receiving tanks
- Exact and reliable function through product-independent switching point

[Show Product](#)





#### VEGAPULS 6X

Level measurement with radar in the receiving tank

- Maintenance-free thanks to non-contact measurement of all media
- Small minimum distance, no mounting socket required
- Encapsulated antenna system ensures continuous availability

[Show Product](#)

PRO
<b>VEGASWING 63</b> <a href="#">Show Product</a>

<b>Process temperature</b> -50 ... 250 °C
<b>Process pressure</b> -1 ... 64 bar
<b>Version</b> Standard Hygienic applications with gas-tight leadthrough with tube extension with temperature adapter
<b>Materials, wetted parts</b> PFA 316L Alloy C22 (2.4602) Alloy 400 (2.4360) ECTFE Enamel
<b>Threaded connection</b> ≥ G¾, ≥ ¾ NPT
<b>Flange connection</b> ≥ DN25, ≥ 1"
<b>Hygienic fittings</b> Clamp ≥ 1" - DIN32676, ISO2852 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851 Varivent ≥ DN25 hygienic fitting F40 with compression nut SMS 1145 DN51 SMS DN38 Hygienic fittings ≥ DN25 - DIN11864-1-A Hygienic flange connection DIN11864-2-A; DN60(ISO)ø60,3 SMS socket piece DN38 PN6
<b>Seal material</b> no media contact
<b>Housing material</b> Plastic Aluminium Stainless steel (precision casting) Stainless steel (electropolished)
<b>Protection rating</b> IP66/IP67 IP66/IP68 (1 bar) IP65

PRO
<b>VEGACAP 63</b> <a href="#">Show Product</a>

<b>Measuring range - Distance</b> -
<b>Process temperature</b> -50 ... 200 °C
<b>Process pressure</b> -1 ... 64 bar
<b>Version</b> PE insulation PE insulation and concentric tube PTFE insulation PTFE insulation with screening tube PN1 PTFE insulation with screening tube PN16 PTFE insulation with screening tube PN40 PTFE insulation and concentric tube
<b>Materials, wetted parts</b> PTFE 316L Alloy C22 (2.4602) Alloy 400 (2.4360) PE Steel C22.8
<b>Threaded connection</b> ≥ G½, ≥ ½ NPT
<b>Flange connection</b> ≥ DN25, ≥ 1"
<b>Seal material</b> no media contact
<b>Housing material</b> Plastic Aluminium Stainless steel (precision casting) Stainless steel (electropolished)
<b>Protection rating</b> IP66/IP68 (0,2 bar) IP66/IP67 IP66/IP68 (1 bar)

PRO
<b>VEGAPULS 6X</b> <a href="#">Show Product</a>

<b>Measuring range - Distance</b> 120 m
<b>Process temperature</b> -196 ... 450 °C
<b>Process pressure</b> -1 ... 160 bar
<b>Accuracy</b> ± 1 mm
<b>Frequency</b> 6 GHz 26 GHz 80 GHz
<b>Beam angle</b> ≥ 3°
<b>Materials, wetted parts</b> PTFE PVDF 316L PP PEEK
<b>Threaded connection</b> ≥ G¾, ≥ ¾ NPT
<b>Flange connection</b> ≥ DN20, ≥ ¾"
<b>Hygienic fittings</b> Clamp ≥ 1½" - DIN32676, ISO2852 Slotted nut ≥ 2", DN50 - DIN 11851 Varivent ≥ DN25 hygienic fitting with tension flange DN32 hygienic fitting F40 with compression nut Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A Hygienic flange connection ≥ DN50 DIN11864-2 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864- 3-A DRD connection ø 65 mm SMS 1145 DN51