



#### Reliable

High security of supply thanks to dependable measurement data

#### Cost effective

Maintenance-free operation

#### User friendly


Simple mounting and setup

## Water storage tanks

### Level and point level measurement in water storage tanks

Water storage tanks are especially important in times of peak demand. They compensate for delivery fluctuations and enable efficient plant operation. The water storage tanks are therefore not just storage tanks, they also serve as equalising tanks. Reliable level and point level measurement are thus indispensable here.

[More details](#)

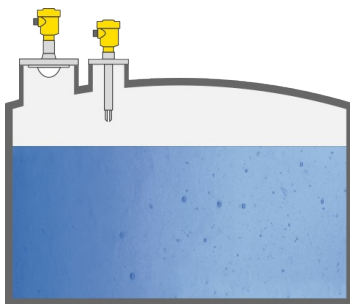

#### VEGASWING 63

Vibrating level switch as overflow protection in water storage tanks

- Precise point level detection thanks to adjustment-free, media-independent switching point
- Simple installation and setup

[Show Product](#)



#### VEGAPULS 6X

Non-contact level measurement with radar in water storage tanks

- High measurement accuracy regardless of ambient conditions
- Reliable measurement ensures continuous water supply
- Maintenance-free operation through non-contact measurement

[Show Product](#)

PRO

## VEGASWING 63

[Show Product](#)



**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with tube extension  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65

PRO

## VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN20, ≥  $\frac{3}{4}$ "

**Hygienic fittings**  
Clamp ≥ 1½" - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 -  
DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
3-A  
DRD connection ø 65 mm  
SMS 1145 DN51