



Reliable

Reliable protection against overfilling

Cost effective

Independent of product and process characteristics

User friendly


Simple setup and commissioning, maintenance-free

Bulk storage tanks

Level measurement and point level detection in bulk storage tanks

Dependable storage is not only the basis for reliable production and supply, it also protects against raw material shortages and price volatility. In addition to regulations on the use of overfill protection or safety instrumented systems, large storage tanks are also often subject to hazardous area codes of practice in conjunction with level measurement.

[More details](#)

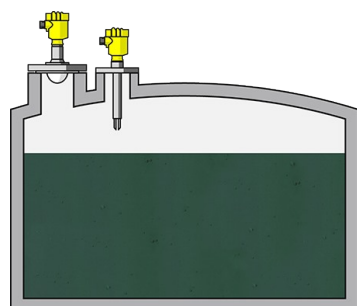

VEGAPULS 6X

Continuous level measurement with radar in bulk storage tanks

- Reliable measurement, independent of density and temperature changes
- Excellent signal focusing ensures high accuracy
- Long service life thanks to maintenance-free operation

[Show Product](#)



VEGASWING 63

Point level detection with vibrating level switch for overfill protection in bulk storage tanks

- Universally applicable as overfill and dry run protection system for virtually all liquid applications
- Accurate level detection thanks to adjustment-free, media-independent switching point
- Highly resistant materials and coatings for long operational life
- Test button for easy testing of instrument functionality during operation

[Show Product](#)

PRO	PRO
VEGAPULS 6X Show Product	VEGASWING 63 Show Product
	
Measuring range - Distance 120 m	Process temperature -50 ... 250 °C
Process temperature -196 ... 450 °C	Process pressure -1 ... 64 bar
Process pressure -1 ... 160 bar	Version Standard Hygienic applications with gas-tight leadthrough with tube extension with temperature adapter
Accuracy ± 1 mm	Materials, wetted parts PFA 316L Alloy C22 (2.4602) Alloy 400 (2.4360) ECTFE Enamel
Frequency 6 GHz 26 GHz 80 GHz	Threaded connection ≥ G¾, ≥ ¾ NPT
Beam angle ≥ 3°	Flange connection ≥ DN25, ≥ 1"
Materials, wetted parts PTFE PVDF 316L PP PEEK	Hygienic fittings Clamp ≥ 1" - DIN32676, ISO2852 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851 Varivent ≥ DN25 hygienic fitting F40 with compression nut SMS 1145 DN51 SMS DN38 Hygienic fittings ≥ DN25 - DIN11864-1-A Hygienic flange connection DIN11864-2-A; DN60(ISO)ø60,3 SMS socket piece DN38 PN6
Threaded connection ≥ G¾, ≥ ¾ NPT	Seal material no media contact
Flange connection ≥ DN20, ≥ ¾"	Housing material Plastic Aluminium Stainless steel (precision casting) Stainless steel (electropolished)
Hygienic fittings Clamp ≥ 1½" - DIN32676, ISO2852 Slotted nut ≥ 2", DN50 - DIN 11851 Varivent ≥ DN25 hygienic fitting with tension flange DN32 hygienic fitting F40 with compression nut Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A Hygienic flange connection ≥ DN50 DIN11864-2 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A DRD connection ø 65 mm SMS 1145 DN51	Protection rating IP66/IP67 IP66/IP68 (1 bar) IP65