



### Reliable

Reliable measurement ensures a continuous supply of raw material

### Cost effective

Optimal stocks enable continuous production

### User friendly


Maintenance-free operation

## Cement silo

### Level and pressure measurement and point level detection in cement silos

Before further processing, the cement is stored in tall silos. The cement is transported both in and out of the silo via pneumatic conveying. Efficient storage and transport of the product is ensured by accurate level measurement and point level detection, as well as also monitoring the pneumatic conveying system pressure.

[More details](#)

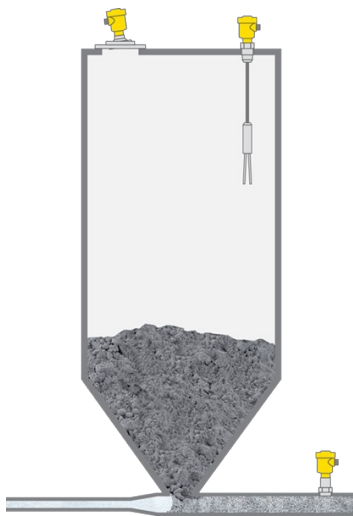

#### VEGAPULS 6X

Non-contact level measurement with radar in cement silos

- Reliable measurement, unaffected by dust generation and buildup
- Maintenance-free operation through non-contact measurement
- Simple mounting with swivelling holder

[Show Product](#)



#### VEGAWAVE 62

Vibrating level switch as overflow protection in cement silos

- Reliable function through product-independent switching point
- Robust sensor construction for long service life
- Simple setup without adjustment

[Show Product](#)



#### VEGABAR 82


Pressure transmitter for monitoring pressure in pipelines


- High plant availability ensured through very high overload resistance
- Maintenance-free operation with highly abrasion resistant ceramic CERTEC® measuring cell

[Show Product](#)

PRO
<b>VEGAPULS 6X</b> <a href="#">Show Product</a>

<b>Measuring range - Distance</b> 120 m
<b>Process temperature</b> -196 ... 450 °C
<b>Process pressure</b> -1 ... 160 bar
<b>Accuracy</b> ± 1 mm
<b>Frequency</b> 6 GHz 26 GHz 80 GHz
<b>Beam angle</b> ≥ 3°
<b>Materials, wetted parts</b> PTFE PVDF 316L PP PEEK
<b>Threaded connection</b> ≥ G¾, ≥ ¾ NPT
<b>Flange connection</b> ≥ DN20, ≥ ¾"
<b>Hygienic fittings</b> Clamp ≥ 1½" - DIN32676, ISO2852 Slotted nut ≥ 2", DN50 - DIN 11851 Varivent ≥ DN25 hygienic fitting with tension flange DN32 hygienic fitting F40 with compression nut Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A Hygienic flange connection ≥ DN50 DIN11864-2 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A DRD connection ø 65 mm SMS 1145 DN51

PRO
<b>VEGAWAVE 62</b> <a href="#">Show Product</a>

<b>Measuring range - Distance</b> -
<b>Process temperature</b> -40 ... 150 °C
<b>Process pressure</b> -1 ... 6 bar
<b>Version</b> Detection of solids in water Suspension cable
<b>Materials, wetted parts</b> 316L FEP PUR
<b>Threaded connection</b> ≥ G1½, ≥ 1½ NPT
<b>Flange connection</b> ≥ DN50, ≥ 2"
<b>Seal material</b> CR, CSM
<b>Housing material</b> Plastic Aluminium Stainless steel (precision casting) Stainless steel (electropolished)
<b>Protection rating</b> IP66/IP68 (0,2 bar) IP66/IP67 IP66/IP68 (1 bar)

PRO
<b>VEGABAR 82</b> <a href="#">Show Product</a>

<b>Measuring range - Distance</b> -
<b>Measuring range - Pressure</b> -1 ... 100 bar
<b>Process temperature</b> -40 ... 150 °C
<b>Process pressure</b> -1 ... 100 bar
<b>Accuracy</b> 0.05 %
<b>Materials, wetted parts</b> PVDF 316L Alloy C22 (2.4602) PP 1.4057 1.4410 Alloy C276 (2.4819) Duplex (1.4462) Titanium Grade 2 (3.7035)
<b>Threaded connection</b> ≥ G¾, ≥ ¾ NPT
<b>Flange connection</b> ≥ DN15, ≥ ½"
<b>Hygienic fittings</b> Clamp ≥ 1" - DIN32676, ISO2852 Slotted nut ≥ DN25 - DIN 11851 hygienic fitting with tension flange DN32 hygienic fitting F40 with compression nut DRD connection ø 65 mm SMS 1145 DN51 SMS DN38 Swagelok VCR screwing Varivent G125 Varivent N50-40 for NEUMO BioControl D50 PN16 / 316L
<b>Seal material</b> EPDM FKM FFKM