



Reliable

Reliable measurement ensures a continuous supply of raw material

Cost effective

Optimal stocks enable continuous production

User friendly


Maintenance-free operation

Cement silo

Level and pressure measurement and point level detection in cement silos

Before further processing, the cement is stored in tall silos. The cement is transported both in and out of the silo via pneumatic conveying. Efficient storage and transport of the product is ensured by accurate level measurement and point level detection, as well as also monitoring the pneumatic conveying system pressure.

[More details](#)

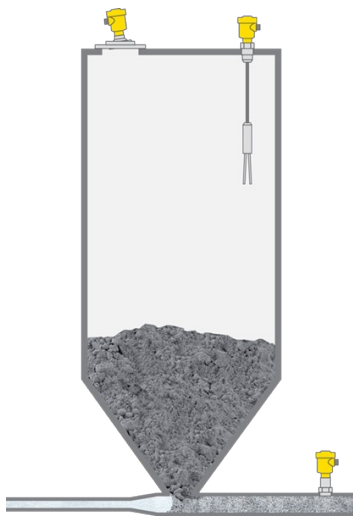

VEGAPULS 6X

Non-contact level measurement with radar in cement silos

- Reliable measurement, unaffected by dust generation and buildup
- Maintenance-free operation through non-contact measurement
- Simple mounting with swivelling holder

[Show Product](#)



VEGAWAVE 62

Vibrating level switch as overflow protection in cement silos

- Reliable function through product-independent switching point
- Robust sensor construction for long service life
- Simple setup without adjustment

[Show Product](#)



VEGABAR 82

Pressure transmitter for monitoring pressure in pipelines

- High plant availability ensured through very high overload resistance
- Maintenance-free operation with highly abrasion resistant ceramic CERTEC® measuring cell

[Show Product](#)

PRO

VEGAPULS 6X

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN20, ≥ ¾"

Hygienic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGAWAVE 62

[Show Product](#)



Measuring range - Distance
-

Process temperature
-40 ... 150 °C

Process pressure
-1 ... 6 bar

Version
Detection of solids in water
Suspension cable

Materials, wetted parts
316L
FEP
PUR

Threaded connection
≥ G1½, ≥ 1½ NPT

Flange connection
≥ DN50, ≥ 2"

Seal material
CR, CSM

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)

PRO

VEGABAR 82

[Show Product](#)



Measuring range - Distance
-

Measuring range - Pressure
-1 ... 100 bar

Process temperature
-40 ... 150 °C

Process pressure
-1 ... 100 bar

Accuracy
0.05 %

Materials, wetted parts
PVDF
316L
Alloy C22 (2.4602)
PP
1.4057
1.4410
Alloy C276 (2.4819)
Duplex (1.4462)
Titanium Grade 2 (3.7035)

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN15, ≥ ½"

Hygienic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ DN25 - DIN 11851
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
DRD connection ø 65 mm
SMS 1145 DN51
SMS DN38
Swagelok VCR screwing
Varivent G125
Varivent N50-40
for NEUMO BioControl D50 PN16 / 316L

Seal material
EPDM
FKM
FFKM