



### Reliable


Reliable measurement of the layer thickness and air flow, even at high combustion temperatures

### Cost effective

Continuous operation and uniform combustion

### User friendly

Maintenance-free measurement

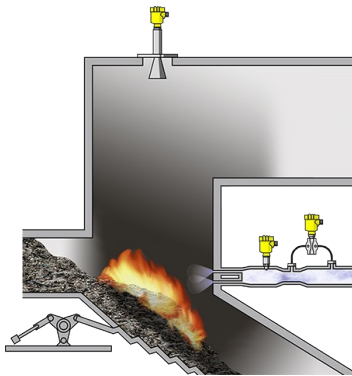

## Incinerator

### Measurement of waste layer thickness and air flow in the incinerator

To ensure that the waste burns completely, temperatures up to 1000 °C must be maintained. For this purpose, large amounts of primary air from below and secondary air from above are blown in. Air quantity and air pressure must be precisely measured. Also an optimum waste layer thickness on the combustion grate is required for uniform combustion.

#### More details



#### VEGABAR 82

Pressure transmitter for measurement of the combustion air

- High overload and vacuum resistance
- Long-term stability via dry measuring cell
- High measurement accuracy, even with very small measuring ranges

#### Show Product



#### VEGADIF 85

Measurement of flow rate and pressure of the combustion air using differential pressure transmitter

- Exact measurement, even with very small pressure differential
- High overpressure and vibration resistance thanks to integrated overload diaphragm
- Universally applicable, with a wide selection of measuring ranges and process fittings
- High operational reliability through SIL 2/3 sensor

#### Show Product



#### VEGAPULS 6X

Non-contact level measurement with radar in the incinerator

- Accurate measurement and precise feed control
- High plant availability thanks to wear and maintenance-free instrumentation
- Unaffected by smoke, dust and noise

#### Show Product

PRO

**VEGABAR 82**  
[Show Product](#)

**Measuring range - Distance**

-

**Measuring range - Pressure**

-1 ... 100 bar

**Process temperature**

-40 ... 150 °C

**Process pressure**

-1 ... 100 bar

**Accuracy**

0.05 %

**Materials, wetted parts**

PVDF  
 316L  
 Alloy C22 (2.4602)  
 PP  
 1.4057  
 1.4410  
 Alloy C276 (2.4819)  
 Duplex (1.4462)  
 Titanium Grade 2 (3.7035)

**Threaded connection**
≥ G $\frac{3}{4}$ , ≥  $\frac{1}{4}$  NPT
**Flange connection**
≥ DN15, ≥  $\frac{1}{2}$ "
**Hygienic fittings**

Clamp ≥ 1" - DIN32676, ISO2852  
 Slotted nut ≥ DN25 - DIN 11851  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 DRD connection ø 65 mm  
 SMS 1145 DN51  
 SMS DN38  
 Swagelok VCR screwing  
 Varivent G125  
 Varivent N50-40  
 for NEUMO BioControl D50 PN16 / 316L

**Seal material**

EPDM  
 FKM  
 FFKM

PRO

**VEGADIF 85**  
[Show Product](#)

**Measuring range - Pressure**

-40 ... 40 bar

**Process temperature**

-40 ... 105 °C

**Process pressure**

-1 ... 400 bar

**Accuracy**

0.065 %

**Materials, wetted parts**

316L  
 Tantalum  
 Alloy C276 (2.4819)  
 Monel

**Threaded connection**
 $\frac{1}{4}$  - 18 NPT
**Flange connection**
≥ DN32, ≥ 1 $\frac{3}{8}$ "
**Seal material**

EPDM  
 FKM  
 Copper

**Housing material**

Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

**Protection rating**

IP66/IP68 (0,2 bar)  
 IP66/IP67  
 IP66/IP68 (1 bar)

PRO

**VEGAPULS 6X**  
[Show Product](#)

**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz  
 26 GHz  
 80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE  
 PVDF  
 316L  
 PP  
 PEEK

**Threaded connection**
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT
**Flange connection**
≥ DN20, ≥  $\frac{3}{4}$ "
**Hygienic fittings**

Clamp ≥ 1 $\frac{1}{2}$ " - DIN32676, ISO2852  
 Slotted nut ≥ 2", DN50 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 Hygienic screw connections ≥ DN50 tube ø53 -  
 DIN11864-1-A  
 Hygienic flange connection ≥ DN50 DIN11864-2  
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
 3-A  
 DRD connection ø 65 mm  
 SMS 1145 DN51